

FIG. 1 is a perspective view of a probe assembly in accordance with the present invention. The probe assembly includes a handle 2, a shaft 6, and a probe tip 8. The handle 2 is connected to the shaft 6, and the shaft 6 is connected to the probe tip 8. The handle 2 is shown in cross-section, revealing internal components including a trigger mechanism 10, a spring 16, and a contact 18. The handle 2 is also labeled with the number 4. The probe tip 8 is shown in cross-section, revealing a sharp point 22.

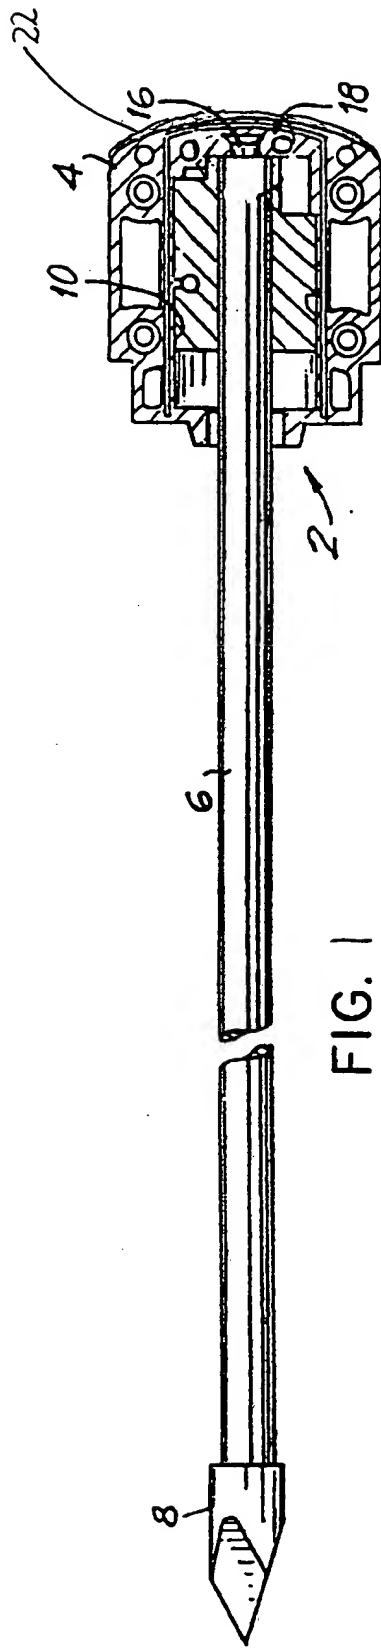


FIG. 1

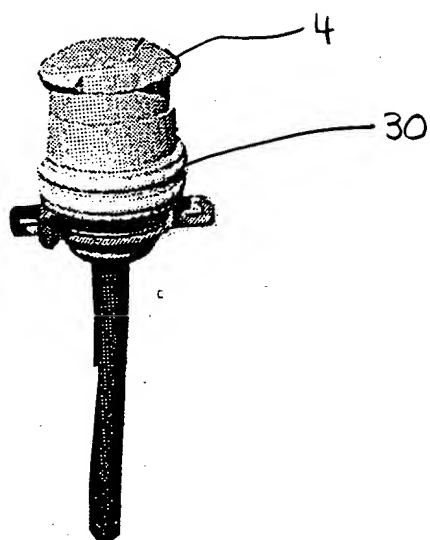


FIG. 2